
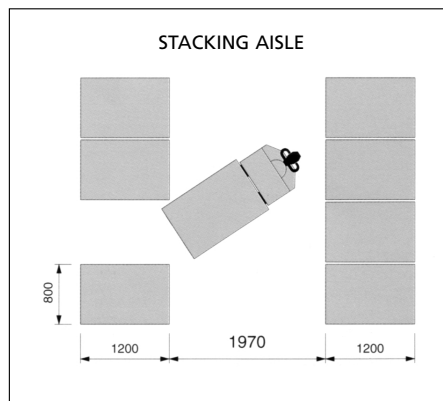


SPECIFICATION

ROBUR K9/TL Powered Pallet Truck

A high quality ergonomic powered pallet truck for busy environments and frequent pallet handling. Suitable for many internal load-moving applications.

- 2000kg capacity @ 600mm load centres
- Spring loaded drive wheel
- Electromagnetic braking
- Electronic speed control
- Tandem load rollers
- Battery discharge indicator
- Single piece welded chassis
- Automatic parking brake
- Electric horn
- Operator safety button
- Painted 'safety' yellow and black
- All models are CE marked
- Options : **stainless steel model** digital weighing system; hinged rider platforms; model TV20 vertical drive motor

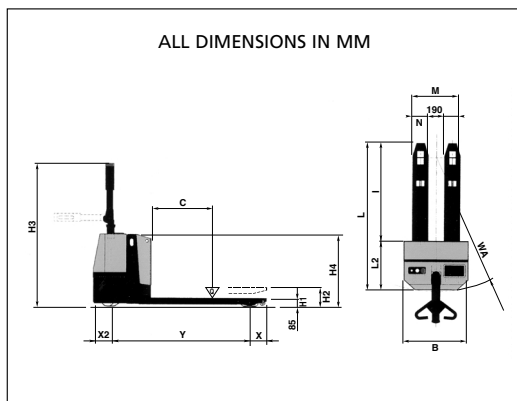

Model	K9/TL20/550	K9/TL20/680
Maximum capacity @ 600mm load centres (kg)	2000	2000
Fork length (mm)	I	1150
Fork width (mm)	M	680
Overall truck length (mm)	L	1670
Wrap-over forks length x width (mm)	I x M	1150 x 680
Lowered fork height (mm)	H1	85
Raised fork height (mm)	H3	200
Overall truck height (mm)		
Overall truck width (mm)	B	800
90° aisle - 1000mm load length (mm)	1770	1770
Maximum lift time to full height (sec)	5	5
Maximum travel speed (km/h)	6	6
Vulkollen drive wheels (mm)	250dia x 100	250dia x 100
Polyurethane tandem load rollers (mm)	80dia x 80	80dia x 80
Polyurethane steering wheels (mm)	125dia x 40	125dia x 40
Battery	160Ah - 24V	160Ah - 24V
Charger 240V	30A	30A
Weight (kg)	230	230
Optional extras:	Shorter forks, stand-on hinged platform	

ROBUR

Stanley Handling Limited
 Coldharbour Lane, Harpenden, Herts AL5 4UR
 Tel 01582 767711 (12 Lines) Fax 01582 765994
 E-mail robur@stanleyhandling.co.uk
www.stanleyhandling.co.uk